



Dynapac CC2200


Double drum vibratory rollers






Technical data


 Masses	
Max. operating mass	9,000 kg
Operating mass (incl. ROPS)	7,700 kg
Module mass (front/rear)	3,850/3,850 kg

 Traction	
Speed range (Dual/TC/AS)	0 - 12
Vertical oscillation	±7°
Theor. gradeability	42 %

 Compaction	
Centrifugal force (high/low amplitude)	78/67 kN
Nominal amplitude (high/low)	0.7/0.3 mm
Static linear load (front/rear)	25.7/25.7 kg/cm
Vibration frequency (high/low amplitude)	48/67 Hz
Water tank (l)	750

 Engine	
Manufacturer/Model	Deutz TCD 3.6 IIIB/T4i
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	75 kW (100 hp) @ 2,200 rpm
Fuel tank capacity	130 l

 Engine	
Manufacturer/Model	Cummins QSB 3.3 IIIA/T3i
Type	Water cooled turbo Diesel with After Cooler
Rated power, SAE J1995	74 kW (99 hp) @ 2,200 rpm



 Hydraulic system	
Driving	Axial piston pump with variable displacement. Axial piston motors (2) with variable displacement.
Vibration	Axial piston pumps (2) with variable displacement. Axial piston motors (2) with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in both drums.

Dynapac CC2200

Double drum vibratory rollers

Atlas Copco

Technical data

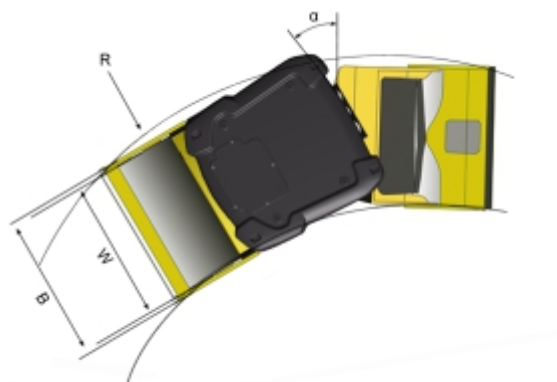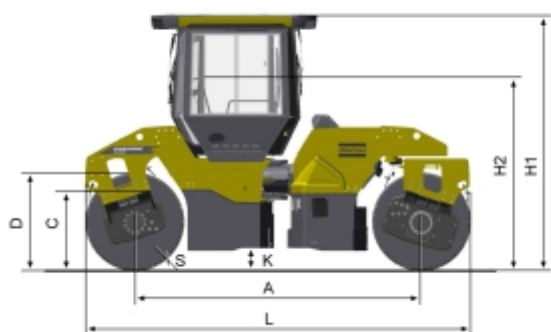

Dimensions	
A. Wheelbase	3,340 mm
B. Width	1,620 mm
C. Curb clearance	715 mm
D. Drum diameter	1,150 mm
H1. Height, with ROPS/cab	2,990 mm
H2. Height, w/o ROPS/cab	2,275 mm
K. Ground clearance	270 mm
L. Length	4,490 mm
R. Turning radius, outside	5,190 mm
S. Drum shell thickness	18 mm
W. Drum width	1,500 mm
6. Steering angle	±32°



ТРАНССТРОЙБЕЛ
НАДЕЖНАЯ ТЕХНИКА - В УМЕЛЫЕ РУКИ

www.tsb.by